

Genio 2-E

centrale radio comando serrande, garage




RADIO SHUTTERS, GARAGE
CENTRAL CONTROL

50-60 Hz - 230 Vac
Consumo scheda in stand-by 1,5 W
Corrente assorbimento motore max 4 A
Portata contatti relè: 8 A
Potenza motore max 1 hp
Tempo di corsa impostabile
Ricevitore integrato per radiocomandi a codice fisso compatibili
Frequenza di ricezione 433 MHz
Morsetto esterno ad aggancio rapido
Abbinabile ai radiocomandi: TE002CF, TE003U
433 Mhz - 20BIT - codice fisso
2 modalità di funzionamento selezionabili da dip-switch

Cassetta IP 56 non inclusa

50-60 Hz - 230 Vac
Power consumption in stand-by 1,5 W
Current motor 4 A max
Max relay load: 8 A
Engine power max 1 hp
Time adjustable
Integrated receiver for fixed code remote controller compliant
Reception frequency 433 MHz
Quick connection plug
Can be combined with the remote control TE002CF, TE003U
433 Mhz - 20BIT - fixed code
2 working mode selectable by dip-switch

IP 56 box not included

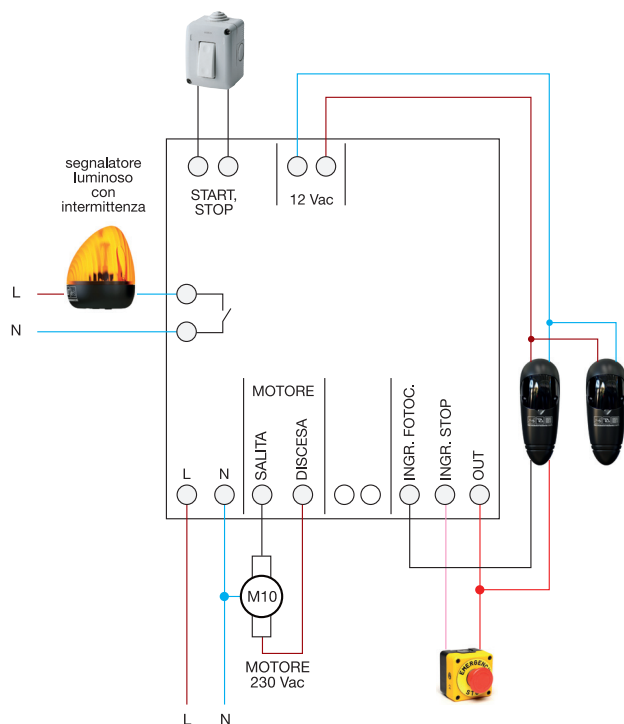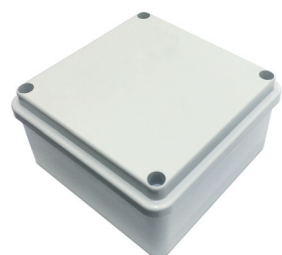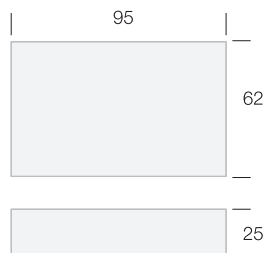

CODICE	POTENZA MOTORE	GRADO DI PROTEZIONE	CORRENTE ASSORBIMENTO	FREQUENZA	PESO	NOTE
CODE	ENGINE POWER	PROTECTION LEVEL	MAX CURRENT	FREQUENCY	WEIGHT	NOTE
	hp	IP	A	MHz	gr	
TA343RF	1	00	4	433	145	centrale di comando / radio blinds central
TA101CA		56			55	cassetta liscia / box 100 x 100 x 50 mm